



RCCN 日成连接器多层尼龙铆钉 Barbed Locking Fastener

单位/Unit:mm

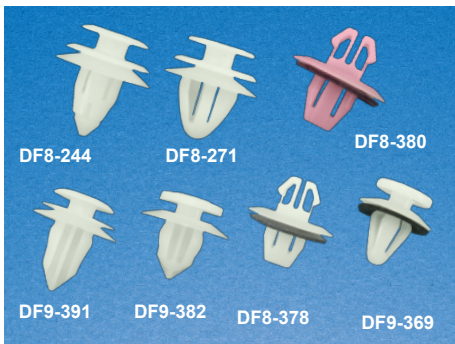


型号 Item No.	头部 Head W	孔径 Hole dia. W1	长度 Length H	包装 Packing pcs
DF8-690	17	8.4*8.6	13.0	100pcs
DF8-689	17	8.4*8.6	17.0	100pcs
DF8-227	17	8.6	10.0	100pcs
DF8-228	17	8.3	16.5	100pcs
DF8-244	上13下18	8.0	13.0	100pcs
DF11-271	上13下18	11.0	11.0	100pcs
DF8-378	18	8.5	8.8	100pcs
DF9-369	上12下16	9.0	11.0	100pcs
DF9-391	上13下18	9.0	14.0	100pcs
DF9-382	上13下18	9.0	12.0	100pcs
DF9-371	上13下18	9.0	14.0	100pcs
DF8-380	18	8.4	9.0	100pcs
DF9-624	上13下18	9.0	17.0	100pcs

材质:UL合格之NYLON66,防火等级94V-2,不易老化。
用途:PC板及机板之固定,取代螺丝,不需工具即可完成装配。
特点:容易固定。
用法:先将机板及被固定板钻孔,再将本产品塞入,即可使两板相线合。
板厚:以H长度小5mm为准。


Material : NYLON66 UL approved, fireproof 94V-2, Good quality, easy to install

产品使用效果图例: DF8-378

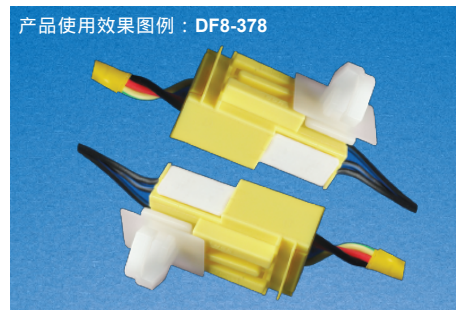

RCCN 日成SR型尼龙铆钉 SR8 Barbed Locking Fastener

单位/Unit:mm

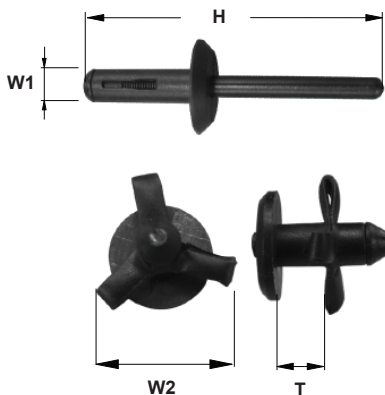

型号 Item No.	固定板厚 Fixed board thickness T	孔径 Hole dia. W1	宽度 Width W2	长度 Length H	包装 Packing pcs
SR4-161	6-10	4.0	16.9	64.2	100pcs
SR6-201	4-10	6.3	16.9	55.5	100pcs
SR6-202	4-10	6.3	12.9	57.0	100pcs
SR6-585	1-4.0	6.3	16.6	55.6	100pcs
SR6-586	4-9	6.3	17.5	56.3	100pcs
SR6-592	1-4.0	6.3	19.8	56.3	100pcs
SR5-460	1.6-4	5.1	11.9	47.6	100pcs
SR6-524	7.5-10	6.3	16.9	54.0	100pcs
SR6-557	8-11	6.3	16.6	54.0	100pcs
SR5-200	3.0-5	5.1	12.3	47.7	100pcs
SR6-203	2.4-4.0	6.7	17.8	47.3	100pcs
SR6-346W	4-5	6.3	16.6	55.6	100pcs
SR6-346	4-5	6.3	16.6	55.6	100pcs
SR6-194	1-4	6.3	16.6	54.8	100pcs
SR5-204	6-9	5.1	12.4	51.8	100pcs
SR5-468	1.1-3	5.1	8.7	46.0	100pcs
SR4-459	1.6-3.0	4.8	8.7	47.6	100pcs
SR6-461Y	2.4-5.0	6.3	16.6	55.6	100pcs
SR6-462	2.4-4.0	6.7	12.7	47.6	100pcs
SR5-467	4.3-8.0	5.9	12.7	52.0	100pcs
SR7-523	2.4-5.0	7.1	18.2	53.4	100pcs
SR5-477	4-7	5.9	15.8	54.0	100pcs
SR6-604	4-6	6.3	16.6	55.6	100pcs
SR6-375W	4-10	6.3	16.6	50.8	100pcs

材质:UL合格之NYLON66,防火等级94V-2,不易老化。
用途:PC板及机板之固定,取代螺丝,
特点:代替金属铆钉,绝缘。
用法:先将机板及被固定板钻孔,再将本产品塞入,拉紧铆钉枪可使两板相线合。

Material : NYLON66 UL approved, fireproof 94V-2, Good quality, easy to install